

Durable, mobile, powerful – the SP 11 LMR plastering machine




Designed with your plastering needs in mind – the SP 11 LMR

- Largest available mixer/hopper for more efficient working
- Water metering pipe in the mixer grille prevents blockages
- Lifting mixer with low filling height for convenient filling
- Conforms with CE standards, simple and clear operation
- Fully hydraulic pump and mixer drive with infinitely variable delivery rate up to 60 l/min
- Quiet 3-cylinder 16.3 kW Kubota engine
- Optimal soundproofing thanks to double-walled hood
- Optimal manoeuvrability thanks to low drawbar load of 35 kg
- Lasting value thanks to high resale value



The specialist machine for all premixed dry mortar and site-made mixes

The Putzmeister SP 11 LMR worm pump has been specially designed to meet the needs for plastering, filling and grouting work. The exceptional capacities of the mixer and hopper provide the necessary resources for a wide variety of tasks, while the machine's low drawbar load means it can be easily and comfortably manoeuvred. The SP 11 LMR offers lasting value – thanks to its lightweight yet robust plastic hood, for example, which can withstand even the toughest conditions on site – thus making it very economical. These are all excellent reasons for choosing a Putzmeister plastering machine, especially if you use site-made mixes or prebagged interior and external plasters, monocoat, fire-proofing mortar, base coat plaster, lightweight masonry mortar, ornamental mortar as well as filling and grouting work. Your expert Putzmeister dealer will be happy to explain the additional advantages to you and answer all your questions with regard to your individual requirements.



Putzmeister

Mörtelmaschinen

Operating panel

The clearly laid out operating panel enables users to control the machine easily and in accordance with CE standards. The delivery rate and water metering are infinitely variable.




Plastic hood

The extremely lightweight plastic hood is particularly robust and optimally protected against corrosion.



Pump

The powerful 2L6 worm pump with M 50 pressure connection is included as part of standard equipment. It can process site-made mixes with up to 6 mm grain size, depending on the desired delivery rate and the properties of the material.

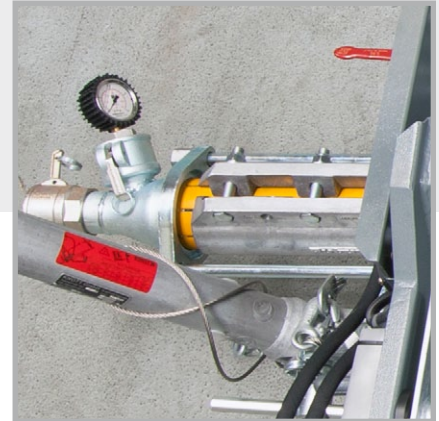

SP 11 LMR technical data (part no.: 111626.100)

Version	Lifting mixer
Pump type	2L6
Delivery pressure	25 bar
Theoretical delivery rate*	5–60 l/min
Delivery distance**	120 m distances, 60 m high
Compressor	2-cylinder compressor 400 l/min, 7 bar
Trap mixer	180 l
Conveyor hopper	220 l
Engine	3-cylinder Kubota, 16.3 kW at 2600 rpm
Chassis	unbraked, suitable for road use
Weight	750 kg
Length x width x height	3480 x 1420 x 1162 mm
Filling height	800 mm
Maximum particle size	6 mm

* The delivery rate is theoretical and depends on the pump pressure.

** The data is based on experience and is dependent on the materials used.

Equipment

Supplementary equipment	LMR
Standard colour paintwork	■
Special colour paintwork (hood)	□
High-pressure cleaner	■
Car coupling	■
Truck coupling	□
Mechanical water metering	■
Support wheel	□
Vibrating screen	□
Working light	□
Dust extraction	□
Cable remote control	□
Radio remote control	□


□ Option ■ Series

Putzmeister Mörtelmaschinen GmbH

Max-Eyth-Straße 10 · 72631 Aichtal

Tel. +49 (7127) 599-0 · Fax +49 (7127) 599-743

mm@pmw.de · www.pmmortar.com



Putzmeister

Mörtelmaschinen